

Como

RGB LED Linear Light




CLN2304-RGB

TECHNICAL DETAILS

Housing:	Extruded aluminum anodized grey
Light Window:	PC
Cable gland:	IP68 Copper PG-7 Pa66
Operating Temperature:	-20°C~40°C
Bracket:	Aluminum anodized grey
Power Cable:	2X0.75mm ² L=0.15m (Low voltage)



LINE ART

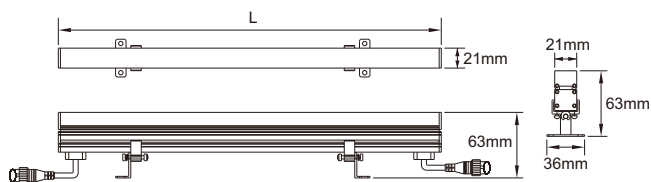


BEAM ANGLE



130°

Low voltage input (24VDC) plug type

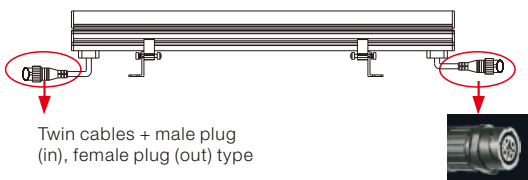

Twin cables + male plug (in), female plug (out) type

APPLICATION

- Illumination of exterior coves.
- Perfect for exterior building facades and parking garages.

ORDERING INFORMATION:

Example: CLN2304-RGB-03-4W-827-LV

Model	Length	Wattage	CRI & CCT	Input Voltage
CLN2304-RGB	03	4W	827	LV
CLN2304-RGB	03 300mm	4W	827 Ra ≥ 80 2700K	LV Low Voltage (24V DC)
	05 500mm	6W	830 Ra ≥ 80 3000K	
	10 1000mm	12W	840 Ra ≥ 80 4000K	