

Como

RGBW LED Linear Light




CLN2303-RGBW

TECHNICAL DETAILS


- Housing: Extruded aluminum anodized grey
- Light Window: PC
- Cable gland: IP68 Copper PG-7 Pa66
- Operating Temperature: -20°C ~ 40°C
- Bracket: Aluminum anodized grey
- Power Cable: 2X0.75mm² L=0.15m (Low voltage)




LINE ART

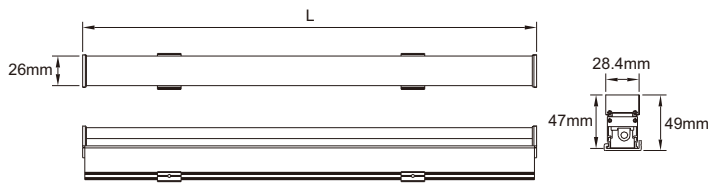

BEAM ANGLE



Low voltage input (24VDC) plug type

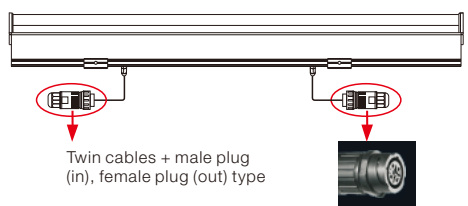

APPLICATION

- Illumination of exterior coves.
- Perfect for exterior building facades and parking garages.

ORDERING INFORMATION:

Example: CLN2303-RGBW-03-5W-827-LV

Model	Length	Wattage	CRI & CCT	Input Voltage
CLN2303-RGBW	03	5W	827	LV
CLN2303-RGBW	03 300mm	5W	827 Ra ≥ 80 2700K	LV Low Voltage (24V DC)
	05 500mm	7.5W	830 Ra ≥ 80 3000K	
	10 1000mm	15W	840 Ra ≥ 80 4000K	