

## High Power Square Spot Light



CSP5061S



CSP5062S




CSP5063S

### TECHNICAL DETAILS

Housing:	Die-casting aluminum grey powder coated.
Light Window:	Tempered glass. T=4mm
Cable Gland:	IP68
LED Driver:	Constant voltage output
LED:	CREE
Operating Temperature:	-20°C~40°C
Power Cable:	2X1mm <sup>2</sup> L=0.15m ( Low voltage ) 3X1mm <sup>2</sup> L=0.15m ( High voltage )



### LINE ART

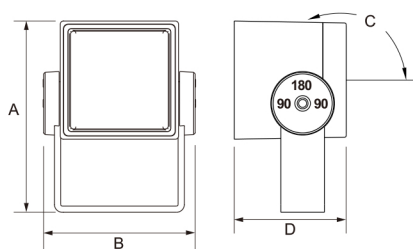


Model	Wattage	A	B	C	D
CSP5061S	4W/8W	123mm	98mm	120°	72mm
CSP5062S	12W/16W/24W	160mm	136mm	120°	82mm
CSP5063S	32W/36W/45W	227mm	190mm	120°	82mm

### APPLICATION

- Lawns and gardens
- Paths

### BEAM ANGLE

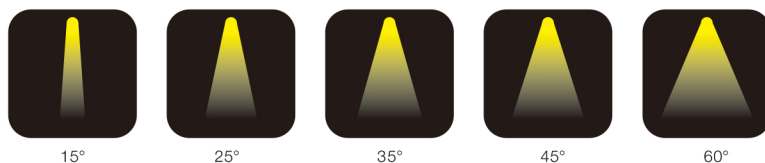

### ORDERING INFORMATION:

**Example:** CSP5061S04-827-15D-LV

Model	CRI & CCT	Beam	Input Voltage
<b>CSP5061S</b>	<b>827</b>	<b>15D</b>	<b>LV</b>
CSP5061S	827 Ra ≥ 80 2700K	15D 15°	LV Low Voltage ( 24V DC )
CSP5062S	830 Ra ≥ 80 3000K	25D 25°	HV High Voltage ( 220-240V AC )
CSP5063S	840 Ra ≥ 80 4000K	35D 35°	
		45D 45°	
		60D 60°	