

LED Linear Light



TECHNICAL DETAILS

LED:	CREE
Operating Temperature:	-20°C~40°C
Bracket:	Aluminum
IP Rating:	IP68
CRI	>80Ra
Burning Hours	35000 hours


IP67 DC12V/24V

KG	Gross weight: 0.4kg/m
	Dimmable: DALI, 0-10V, DMX, Triac
0°C to 55°C	Installation Temp.: 0°C to +55°C
-25°C - 55°C	Ambient Temp.: -25°C to +55°C
80mm	Min. Bending : 80mm
114°	Beam Angle : 114 degree

Features

- Uniform and even light output
- Flat surface with 114 degree beam angle
- Constant Current IC built in optional
- Dimmable with Dali, 0/1-10, DMX,PWM
- High Lumen output

LINE ART

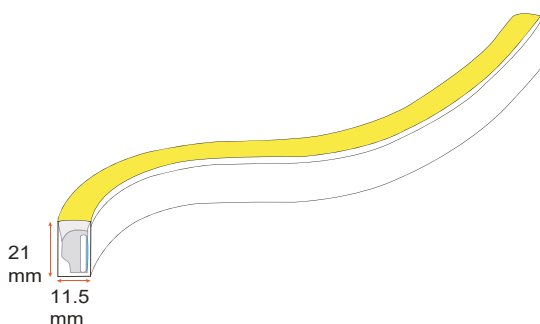

Model	Wattage	Dimension	Beam Angle	Lumen Output
HJ-NL0603	6W	(H)21x(W)11.5mm	114°	>200m

APPLICATION

- Building facade, outline Cove lighting
- Sign and advertising lighting Linear lighting
- Additional lighting Decorative lighting

ORDERING INFORMATION:

Example: CWW1641-RGBW-03-12W-A-LV

Model	Length	Wattage	Beam	Input Voltage	
CWW1641-RGBW	03	12W	A	LV	
CWW1641-RGBW	03	300mm	12W	A 45°	LV Low Voltage (24V DC)
CWW1642-RGBW	05	500mm	24W	B 60°	
CWW1643-RGBW	10	1000mm	48W	C 10x60°	